

VÁLVULAS SECCIONAMENTO TIPO GLOBO F.F. T.I.S. MOD. B043

GLOBE VALVE ON-OFF TYPE

T.I.S. service

Art. B043 TIS

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001/2000 =

VALVOLA A FLUSSO AVVIATO PN16



GLOBE VALVE ON-OFF TYPE PN16

APPLICAZIONE:

Installazioni acqua, vapore e olio..

APPLICATION:

Suitable for water, steam and oil.

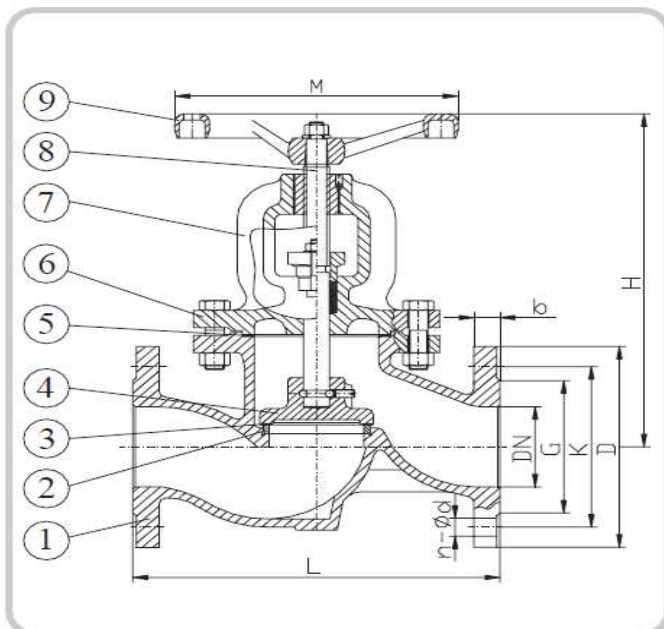

NORMA PROGETTO: EN 1074-1
EN 1074-5
SCARTAMENTO: EN 558-1
FLANGE: EN 1092-2
COLLAUDI: EN 12266
TEMPERATURA ESER: Max + 200°C
DESIGN STANDARD: EN 1074-1
EN 1074-5
FACE TO FACE: EN 558-1
FLANGES: EN 1092-2
TESTS: EN 12266
WORKING TEMP: Max + 200°C

DENOMINAZIONE PART	MATERIALI MATERIALS
1 CORPO BODY	GJL 250 GJL 250
2 SEDE DI TENUTA SEAT RING	ACCIAIO INOX STAINLESS STEEL
3 ANELLO DI TENUTA RETAINING RING	ACCIAIO INOX STAINLESS STEEL
4 DISCO DISC	GJL 250 GJL 250
5 GUARNIZIONE GASKET	GRAFITE GRAPHITE
6 CAPPELLO BONNET	GJL 250 GJL 250
7 STAFFA PACKING GLAND	GJL 250 GJL 250
8 ASSE STEM	ACCIAIO INOX STAINLESS STEEL
9 VOLANTINO HANDWHEEL	GJL 250 GJL 250

DN	D	K	G	b	n-ød	L	H	M	Weight (kg)
15	95	65	47	14	4-14	130	160	80	3.4
20	105	75	58	16	4-14	150	165	80	3.8
25	115	85	68	16	4-14	160	190	100	5.1
32	140	100	78	18	4-18	180	210	120	8
40	150	110	88	18	4-18	200	220	140	9.4
50	165	125	102	20	4-18	230	235	140	11.4
65	185	145	122	20	4-18	290	275	160	18
80	200	160	138	22	8-18	310	335	240	30.7
100	220	180	158	24	8-18	350	375	240	40
125	250	210	188	26	8-18	400	425	280	62
150	285	240	212	26	8-22	480	490	320	91
200	340	295	268	30	12-22	600	620	360	153

COLORE: Grigio RAL 7015.

COLOUR: Grey RAL 7015.

Ecoterme - Equipamentos e Instalações Térmicas, Lda.

RUA DOS SELÕES

CONDOMÍNIO TERRUGEM PARK II, ARMAZÉM B1

Vila Verde

2706-501 TERRUGEM SNT - PORTUGAL

TELF.: 351 21 9605700 (BUSCA AUT.)

FAX.: 351 21 9605709

www.ecoterme.pt